



GU10-5W

GOLDYEAR


Shining Your Life

Specification Sheet

Diameter	50mm
Length	55mm
Input power	5W
Input voltage (Non-Dim /Dim)	220-240V
Power factor	95%
Switch ON time	0.5 Sec
Dimmable	No/Yes
Energy class	A+
Equivalent	50W halogen
Brightness Warm white (2700K, CRI 92) Warm white (3000K, CRI 82) Natural white (4000K, CRI 82)	430lm 470lm 500lm
Available beam angle	24°/45°/60°
LED brand	CREE
Net weight (Dim lamp)	0.065 kg
Main materials	Aluminum, Conductive Plastic and Thermal Painting

Product Code

Product Code	Watt	Angle	Lumens	Color/CRI	Input
GYGU10RL5WD-24D27K	5W	24°	430lm	2700K / CRI > 92	AC 230-240V
GYGU10RL5WD-24D30K	5W	24°	470lm	3000K / CRI > 82	AC 230-240V
GYGU10RL5WD-24D40K	5W	24°	500lm	4000K / CRI > 82	AC 230-240V
GYGU10RL5WD-45D27K	5W	45°	430lm	2700K / CRI > 92	AC 230-240V
GYGU10RL5WD-45D30K	5W	45°	470lm	3000K / CRI > 82	AC 230-240V
GYGU10RL5WD-45D40K	5W	45°	500lm	4000K / CRI > 82	AC 230-240V
GYGU10RL5WD-60D27K	5W	60°	430lm	2700K / CRI > 92	AC 230-240V
GYGU10RL5WD-60D30K	5W	60°	470lm	3000K / CRI > 82	AC 230-240V
GYGU10RL5WD-60D40K	5W	60°	500lm	4000K / CRI > 82	AC 230-240V

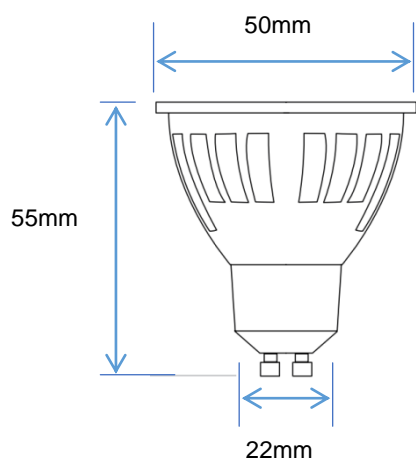

Goldyear Industrial Limited


1F, No. 10, Bai 7th St, QiduDist, Keelung City, Taiwan (20649)

Tel: +886-2-24517468


<http://www.goldyear.net/>

Light Cone


2700K CRI92 24°

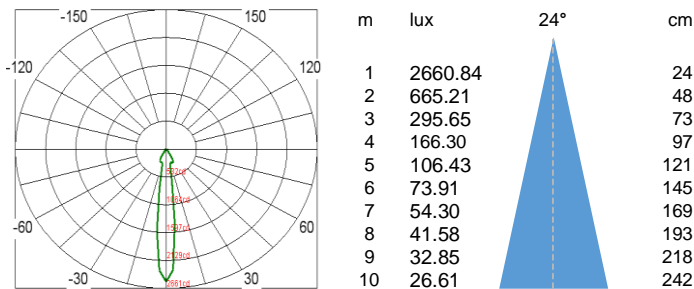


2700K CRI92 45°

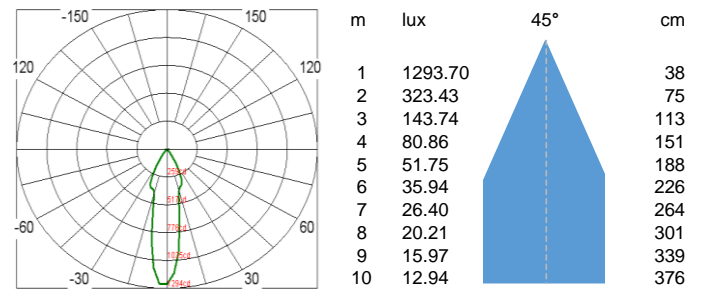


2700K CRI92 60°

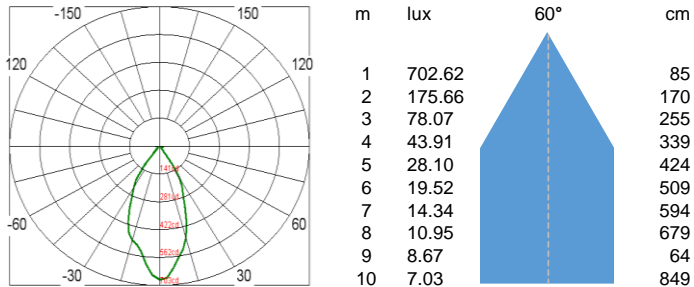


3000K CRI82 24°

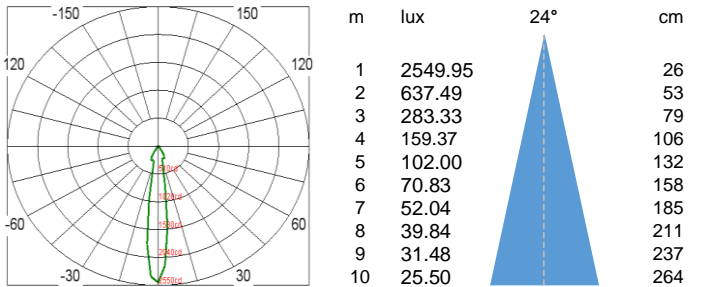

3000K CRI82 45°

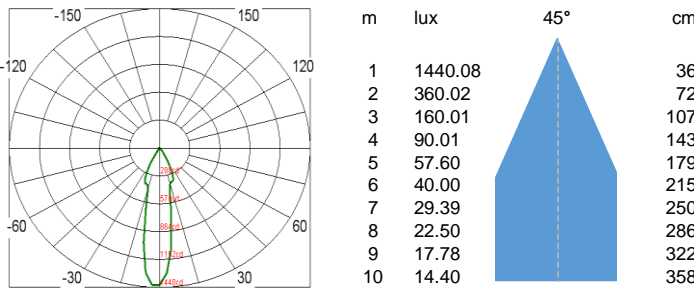


3000K CRI82 60°

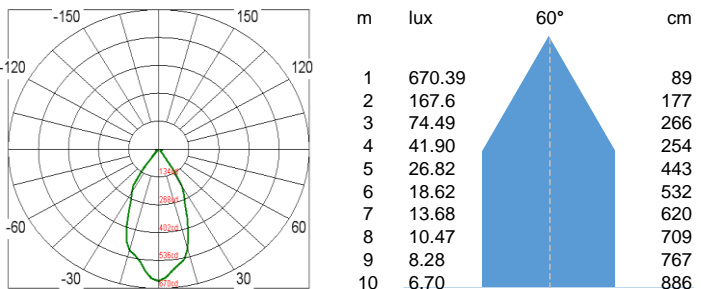


Light Cone

4000K CRI82 24°

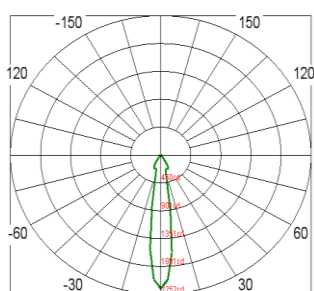


m	lux	24°	cm
1	2251.63		29
2	562.91		57
3	250.18		86
4	140.73		114
5	90.07		143
6	62.55		171
7	45.95		200
8	35.18		229
9	27.80		257
10	22.52		286

4000K CRI82 45°

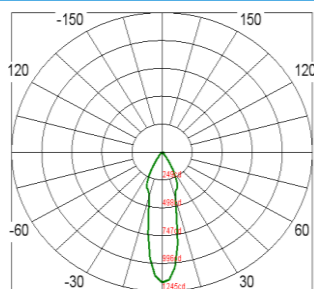

m	lux	45°	cm
1	1245.41		41
2	311.35		82
3	138.38		123
4	77.84		164
5	49.82		205
6	34.59		246
7	25.42		288
8	19.46		329
9	15.38		370
10	12.45		411

4000K CRI82 60°

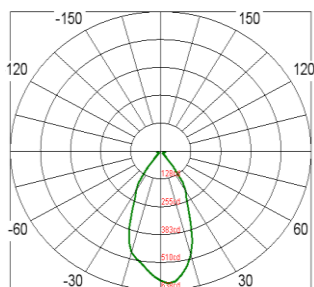

m	lux	60°	cm
1	679.81		89
2	159.45		177
3	70.87		266
4	39.86		254
5	25.51		443
6	17.72		532
7	13.02		620
8	9.97		709
9	7.87		767
10	6.38		886